


The Principle of Wewon's Salt Spray Test Chamber



Standard: ISO 6270, ISO 11503, ASTM D4585, ASTM D2247, INS 30.16.08, EN 1096, DIN 50.517, JIS H8502, IEC 68-2-11, MIL-STD-750

Spray : 1.0-2.0ml/80c m²/H; Spray Type: Continuous / Periodic / Programmable

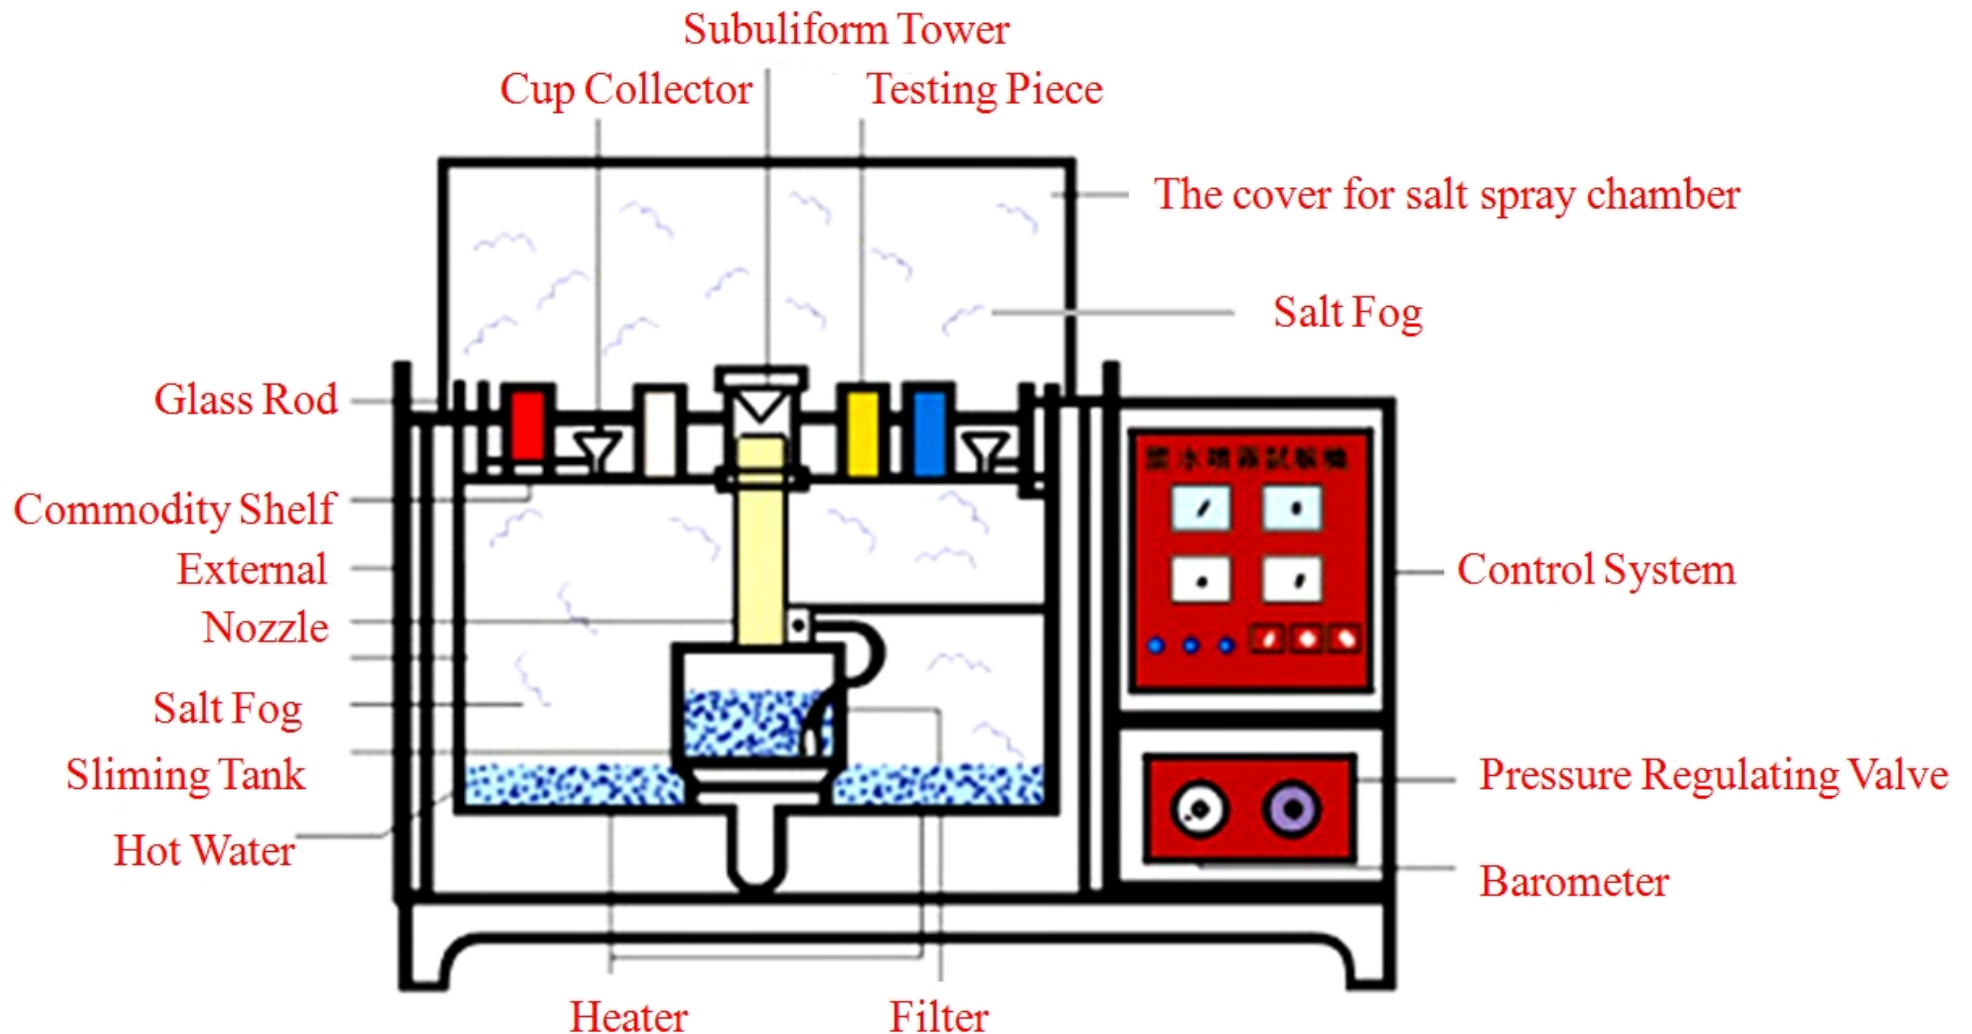

Enclosure Material: PVC, Grade A, Time Relay/ Middle Relay : OMRON Japan

<http://www.wewontech.com/salt-spray-chamber/>

